

RMALDCBS1X8



GPS Rack Mounted Amplified 1X8 Splitter Technical Product Data Features

- Excellent Amplitude Balance
 - Less than 1 dB variation between ports.
- Flat Group Delay
 - Less than 1ns variation between L1 and L2.
- High Output Gain
 - 14 dB gain is typical across all operating frequencies in the standard configuration.
- Wide Accepted Frequency Range
 - Accepts signals from the entire L-Band, covering all major GNSS constellations.
- Efficiently Blocked Ports
 - Uses 200Ω resistors to prevent antenna alarm faults from connected devices.
- LED Power Light
- -48VDC Option Available
- Durable Rugged Standard 1U Chassis



Description

This **Rack Mounted Amplified Loaded DC Blocked Splitter 1X8 (RMALDCBS1X8)** is an active one input, 8 output RF splitter that splits signals from 1.1 GHz to 1.7 GHz with a form factor designed to be installed in a server rack. This equipment is designed to amplify and split signals within the L-band to provide multiple devices with the signal from a single antenna. In the standard configuration, the J1 port will pass DC voltage from a connected device and pass this power to the antenna or other devices upline from the splitter via the antenna port. The other ports (J2-J8) are DC blocked and loaded with 200Ω resistors to simulate antenna current draw which prevents antenna alarm faults. Custom gain configuration, DC configuration, and connector configuration are available upon request. With the larger form factor, we are able to add additional equipment to meet requirements not included in the default device at an additional cost and lead time.

Use Cases

- Splitting and amplifying a roof antenna signal between 8 GPS/GLONASS/GNSS receivers.
- Splitting and amplifying an antenna signal to 8 passive antennas to re-radiate multiple rooms.
- Usable as a part of a larger signal distribution network.

RMALDCBS1X8

Electrical Specifications, TA=25°C

General Specification

Parameter	Notes	Min	Typ	Max	Unit
Frequency Range	Covers all major GNSS constellations.	1.1		1.7	GHz
Characteristic Impedance	Unused ports should be terminated with 50Ω loads.		50		Ω
Req. DC Input V.	Operating voltage range for non-networked units.	3.3		15	VDC
Current Draw	Typical current consumption.		28		mA

GPS L1 & L2 RF Specification (1)

Parameter	Notes	Min	Typ	Max	Unit
Gain	The relative increase in signal power provided by the amplifier.	13.0	14.0	15.0	dB
High Isolated Gain	The relative increase in signal power provided by the amplifier when the device is high isolated.	3.0	4.0	5.5	dB
Input SWR	Input Standing Wave Ratio: S11		1.5:1	2.0:1	-
Output SWR	Output Standing Wave Ratio: S22		1.5:1	2.0:1	-
Noise Figure	The increase in noise power relative to an ideal amplifier.		L1: 2.5 L2:4.8		dB
Gain Flatness	The difference in loss or gain between the L1 and L2 frequencies.		0.5	1.0	dB
Amplitude Balance	The difference in gain or loss between each output port.			1.0	dB
Isolation	The amount of attenuation between two output ports.	L1:18 L2:13		L1:36 L2:27	dB
Group delay flatness	The difference in signal delay between the L1 and L2 frequencies.			1.0	ns
Input P1dB	The 1dB compression point.		-21.8		dBm

(1): Performance is slightly reduced around GPS L5. If working on sensitive L5 applications, please request performance data.

External Power Options (Networked Option)

Source Voltage Options	Voltage Input		Style
	110VAC		Transformer (ITA Type A Wall Mount)
	220VAC		Transformer (ITA Type C Wall Mount)
	240VAC (United Kingdom)		Transformer (ITA Type G Wall Mount)
Customer Supplied DC 9-32 VDC		MIL-DTL-5015 10SL DC Connector (Includes Mate)	
Output Voltage Options (2)	DC Voltage Out		Max Current out For Corresponding Vout
	3.3 V		110mA
	5V		130mA
	9V		140mA
	12V		180mA
	15V		220mA
Custom		Custom	
Standard DC Configuration without External Power Option			
J1/Output 1 Pass DC, J2-J8/Output 2-8 Block DC, Input Pass DC			
Standard DC Configuration with any External Power Option (AC/DC or Military DC)			
All Outputs DC Blocked with 200Ω load standard			
Any port can be custom selected to Pass or Block DC			
Connector Options	Connector Style		Charge
	Type N-female		No Charge
	Type SMA-female		No Charge
	Type TNC-female		No Charge
	Type BNC-female		No Charge
Other		Contact GPS Networking	

(2): With Network Option, any RF port (input or output) can be specified to Pass DC or Block DC

RMALDCBS1X8



Part Number Configuration

*Network Option (External Power Supply)
Requires 'N', Output Voltage and Power Type*

N HI RM ALDCB S1x8 - N / 5 / 110

Network Option: _____
N = External Power; **Blank** = No External Power

High Isolated: _____
HI = High Isolated

Rack Mount: _____
RM = Rack Mount Chassis 1U (1.75")

Amplified Loaded DC Blocked Outputs: _____
ALDCB = 200Ω DC Blocked Outputs

Splitter Type: _____
S1X8 = GPS Splitter 8 Outputs

Connector Options (Type Female Standard): _____
N = N type; **S** = SMA; **T** = TNC; **B** = BNC

DC Output Voltage (*only with Network Option*): _____
0, 3.3, 5, 9, 12, 15, XX (Custom: "XX")

Source Voltage (*only with Network Option*): _____
110 = 110VAC, **220** = 220VAC (2 prong Euro), **240** = 240VAC (3 prong UK),
MC = Military DC Connector (User supplies DC voltage range 9-32VDC)
MC+/- 48 = Military DC Connector
(User may supply +/- 36-72 VDC. Example Part Number: NRMALDCBS1X8-N/5/MDC+/-48)

(Military DC Mating Connector is included standard with the MC power option).

When no external power supply option (AC or DC) is selected, Output 1/J1 is Pass DC Standard.
When external power supply option is selected, all outputs are DC blocked standard.

Contact GPS Networking Technical Support at 1-800-463-3063 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers.


RMALDCBS1X8



Performance

RMALDCBS1X8 (Standard Gain, typical)

Each RMALDCBS1X8 ships with a test sheet that verifies critical performance characteristics, such as gain, input VSWR, and amplitude balance; a typical VNA test sheet is shown below.

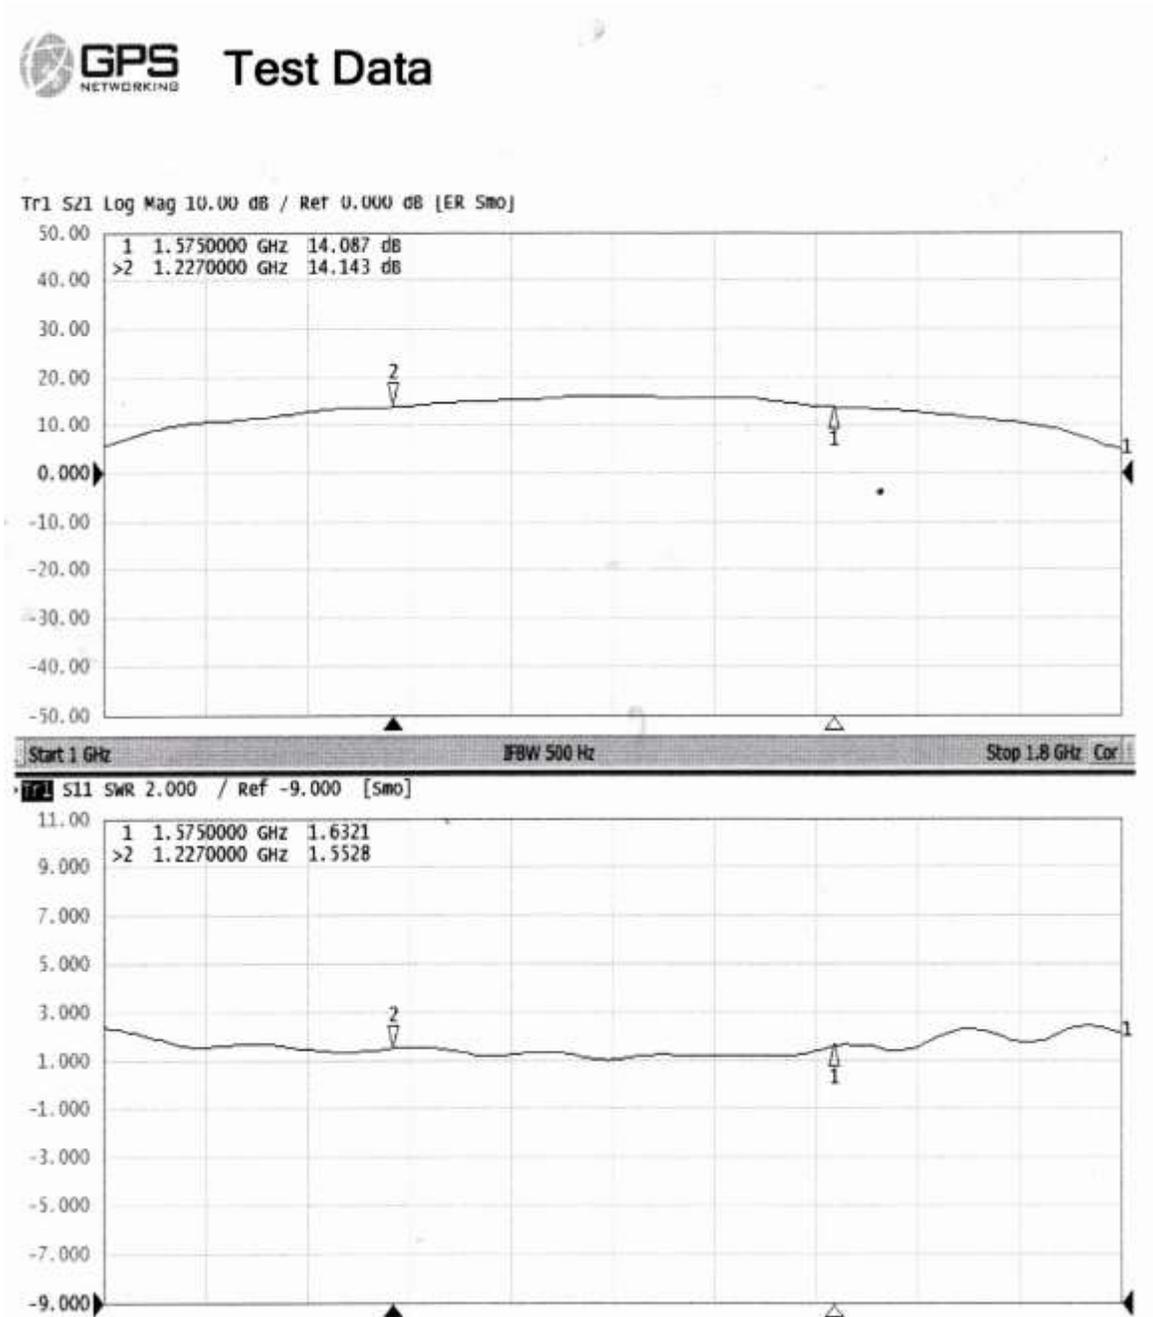


RMALDCBS1X8




HIRMALDCBS1X8 (Hi Isolation, Typical Gain)

Each HIRMALDCBS1X8 ships with a test sheet that verifies critical performance characteristics, such as gain, input VSWR, and amplitude balance; a typical VNA test sheet is shown below.

GPS NETWORKING Test Data

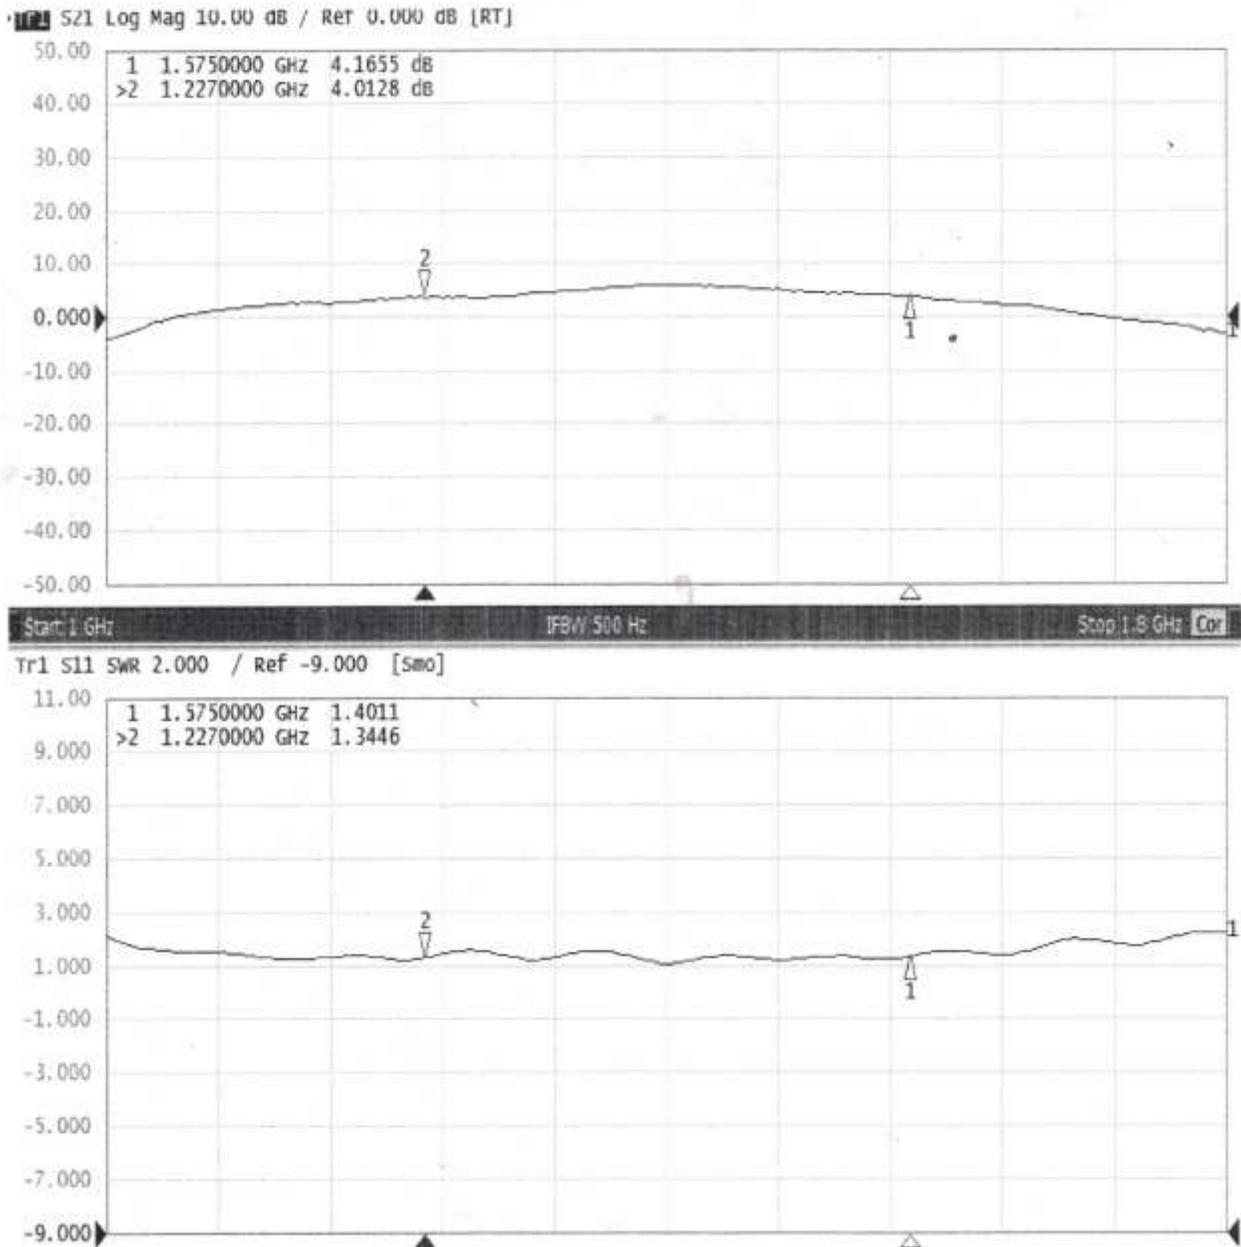

Mechanical

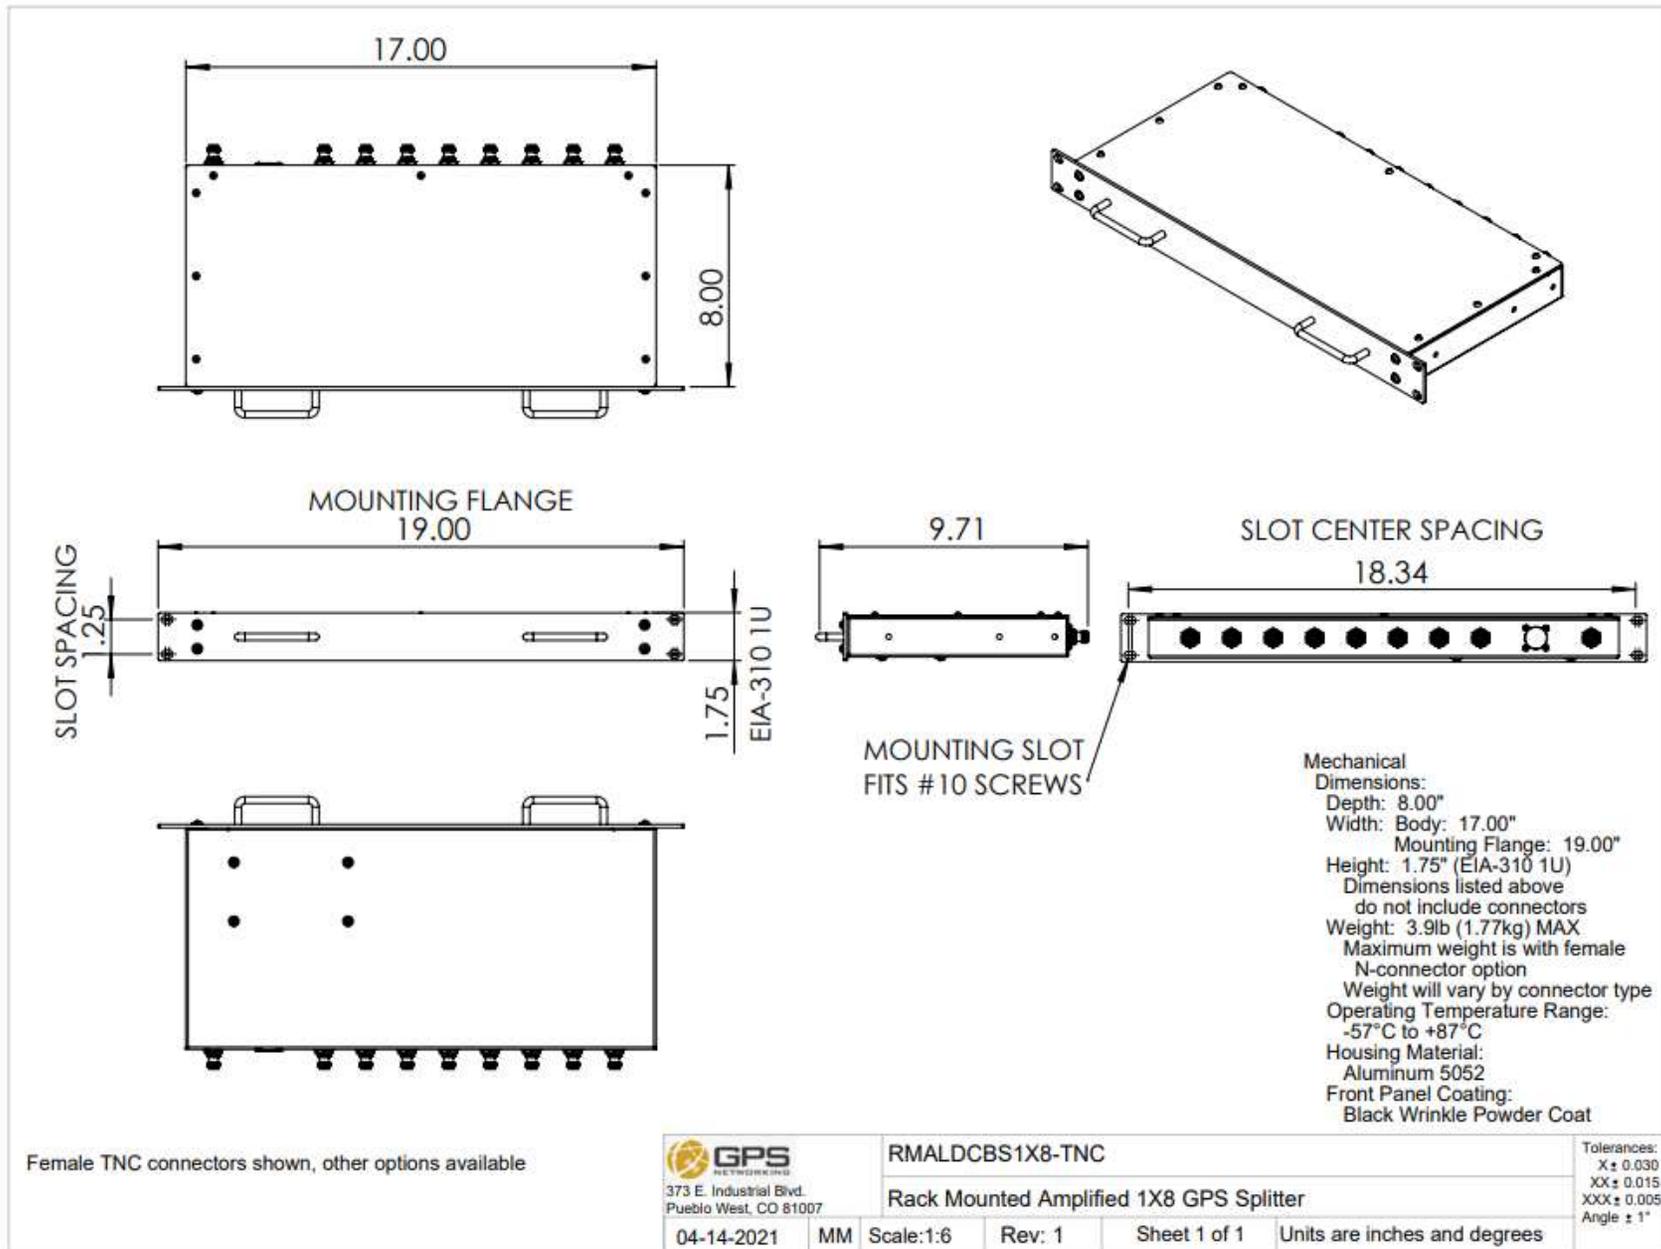

Contact us at salestech@gpsnetworking.com for 3D models or CAD drawings.