





When precision matters..®

## A Tallysman Accutenna® TW7875 Magnetic Mount Dual Band (L1/L5) GNSS Antenna

The TW7875 is precision tuned dual band, *Accutenna*® technology antenna for reception of GPS L1/L5, GLONASS G1, BeiDou B1, Galileo E1/E5a, NavIC L5 and is especially designed for precision dual frequency positioning. The TW7875 provides superior multi-path rejection and axial ratio, a linear phase response, and tight Phase Centre Variation (PCV), while protecting against intermodulation and saturation caused by high level cellular 700MHz signals. This antenna is ideal for precision agriculture, autonomous vehicle tracking and guidance, and other applications where precision matters.

The TW7875 features a precision tuned, twin circular dual feed, stacked patch element. The signals from the two orthogonal feeds are combined in a hybrid combiner, pre-filtered to minimize interference from out of band signals such as Cellular LTE then amplified in a wide-band LNA and band-split for additional filtering and amplification stages prior to recombination at the output.

The TW7875 provides reception for signals in the bands 1164MHz to 1189MHz and 1557MHz to 1606MHz. It is housed in a magnetic mount, weather-proof enclosure.

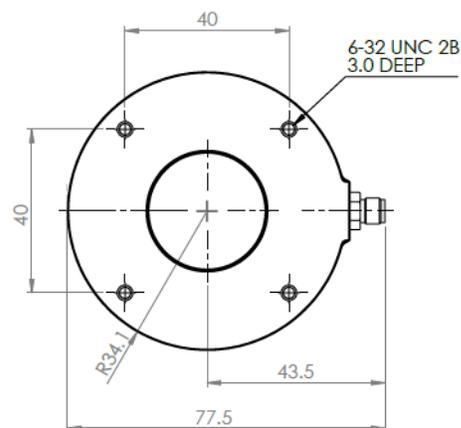

### Applications

- Precision GPS position
- Dual Frequency RTK systems
- Mission Critical GPS Timing
- Military & Security

### Features

- Very low Noise Preamp, < 2.5dB
- Axial ratio:  $\leq 1.5$ dB typ.
- IP67 Housing
- LNA Gain 32 dB typ.
- Low current: 24mA typ.
- ESD circuit protection: 15 KV
- Invariant performance from: +2.5 to 16VDC

### Benefits

- Ideal for dual band RTK surveying systems
- Great multipath rejection
- Increased system accuracy
- Great signal to noise ratio
- IP67, REACH, RED, and RoHS compliant



When precision matters..®

## TW7875 Magnetic Mount Dual Band (L1/L5) GNSS Antenna

### Specifications (Measured a Vcc = 3V, and Temperature=25°C)

#### Antenna

Patch Architecture	Circular, Dual Feed, Dual Stacked Patch
L5 Gain (100mm ground plane), 1164-1189MHz	4.0 dBic Min at Zenith on 100mm Ground Plane
L1 Gain (100mm ground plane), 1575.42MH-1606MHz	4.5 dBic Min at Zenith on 100mm Ground Plane
Axial Ratio, over full bandwidth, L1	≤ 1dB typ., 1.5 dB max.
Axial Ratio, over full bandwidth, L5	≤ 1.5dB typ., 2 dB max.
1dB Bandwidth	L5: 1164MHz-1189MHz    L1: 1557MHz-1606MHz
Polarization	RHCP

#### Electrical

Bandwidth	L5: 1164MHz-1189MHz (Filter bandwidth) L1: 1557 MHz-1606MHz (Filter bandwidth)			
Overall LNA Gain	32dB typ, each of L1 and L5 Bands,			
Gain Variation with Temperature.	3dB max over operational temperature range			
LNA Noise Figure	2.5dB typ @25°C			
VSWR (at LNA output)	<1.5:1 typ 1.8:1 max.			
Supply Voltage Range	+2.5 to 16VDC nominal, up to 50mV p-p ripple			
EMI Immunity	50V/Meter, excepting L1+/-100MHz and L5 +/- 100MHz			
Supply Current	24 mA typ. at 25°C, 25mA max at 75°C.			
ESD Circuit protection	15 KV air discharge.			
Out-of-Band Rejection	<b>L1</b>		<b>L5</b>	
	<1450 MHz	>40 dB	<1040MHz	>60 dB
	<1520 MHz	>30 dB	<1120MHz	>40 dB
	>1650 MHz	>35 dB	>1225MHz	>30 dB

#### Mechanicals & Environmental

Mechanical Size, Ground Plane	69mm (dia) x 22mm (H)
Operating Temperature Range	-40°C to +85°C
Enclosure	Radome: EXL9330, Base: Zamak White Metal
Weight	180 g
Attachment Method	Magnetic Mount. Four-threaded holes (#6x32, 3mm deep) in the base allow for screw mounting.
Environmental (housing)	IP67, RoHS, RED, and REACH compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	MIL STD 810D
UV	MIL-810G Method 505.6, Procedure II

#### Ordering Information

TW7875 – Dual Band L1/L5 GNSS antenna

33-7875-xx-yyyy

Where xx = connector type and yyyy = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/index.php/gnss/ordering-guide/>) for the current and complete list of available connectors.



An ISO 9001:2015 Certified Company

36 Steacie Drive Ottawa ON K2K 2A9 Canada

Tel +1 613 591 3131 Fax 613 591 3121

[sales@tallysman.com](mailto:sales@tallysman.com)

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2018 Tallysman Wireless Inc. All rights reserved. v1.2